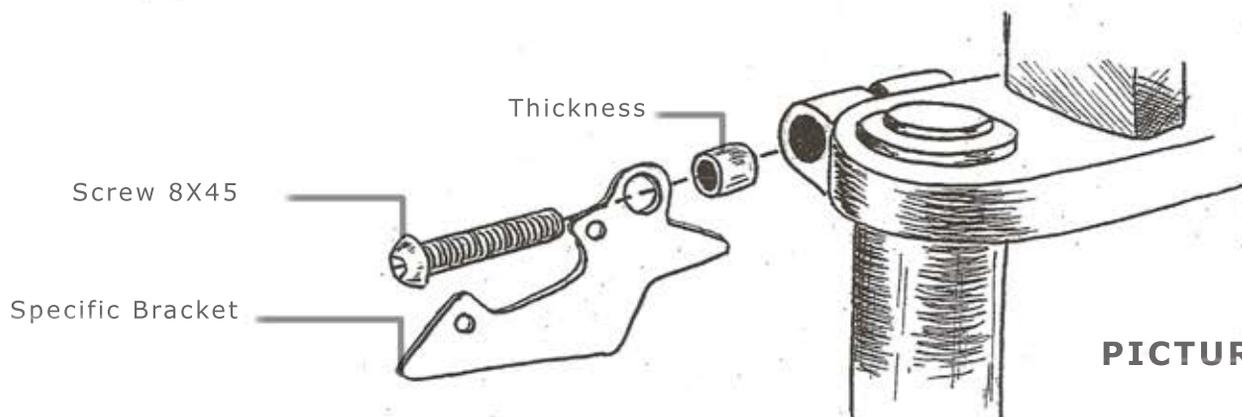
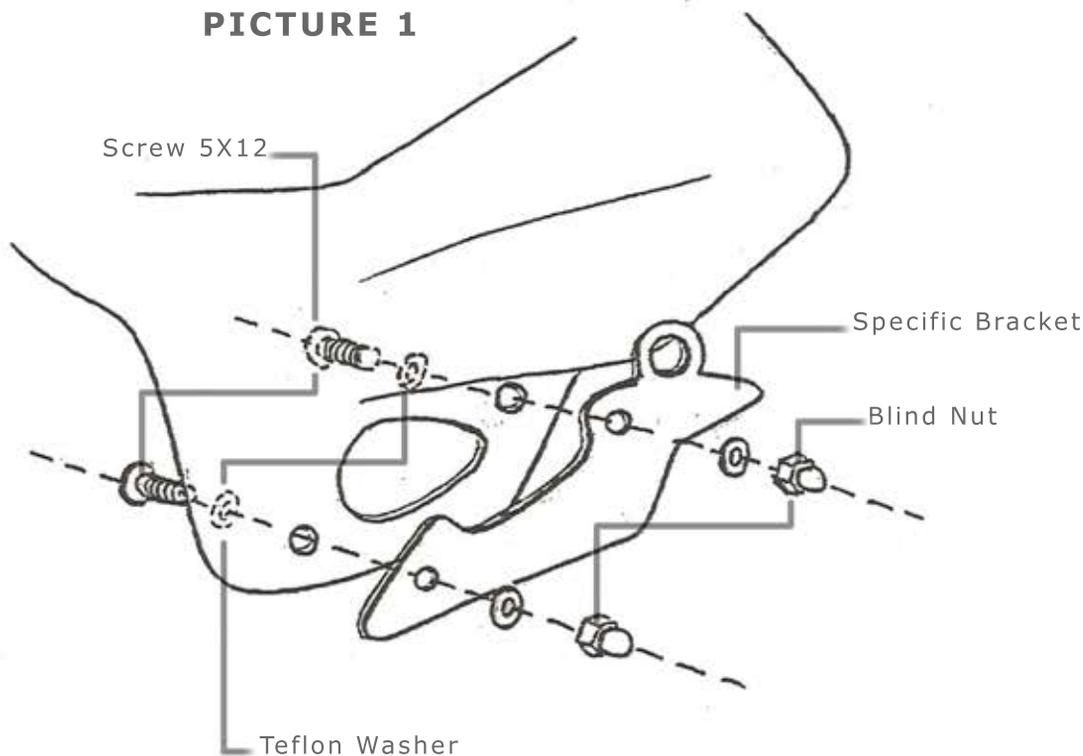


MOUNTING PROCEDURE**KIT WINDSHIELD
YAMAHA FZ6 '04****YF6300****KIT**

- X2. BRACKET
- X2. "ROUND HEAD" SCREW 8X45
- X2. WASHER Ø 8
- X2. THICKNESS Ø 10
- X4. "ROUND HEAD" SCREW 5X12
- X4. TEFLON WASHER Ø 5
- X4. BLIND NUT Ø 5
- X4. WASHER Ø 5
- X1. BARRACUDA WINDSHIELD/SCREEN

WWW.BARRACUDAMOTO.COM**PICTURE 1****PICTURE 2**

MOUNT THE BRACKET ON THE SIDE OF WINDSHIELD/SCREEN (PICTURE 1) REMOVE THE ORIGINAL HEADLIGHT UNSCREWING THE FOUR BOLTS ON THE SIDE. TAKE OUT THE INDICATORS FROM THEIR POSITION UNLOCKING THEM FROM THE INSIDE, TAKING OUT THEM FROM THEIR PLASTIC SUPPORT. DISCONNECT THE 2 CABLES.

POSITION THE WINDSHIELD/SCREEN ON THE HEADLIGHT GROUP WITH THE ELLIPSOIDAL HOLES IN CORRESPONDANCE OF RELATIV HOLES ON THE HEADLIGHT, SO REMOVE THE INDICATORS AND RECONNECT THEM. PUT THE HEADLIGHT IN THE ORIGINAL POSITION FIXING IT WITH THE 4 SCREWS, FIX THE STIR-RUP WITH THE SCREW AND THE WASHER INCLUDED IN THE KIT USING THE THICKNESS / (PICTURE 2)